

Cabled Pullover

Using Cascade Dolce



Designed by Melissa Leapman
for Cascade Yarns

Cabled Pullover – CYPW200

Designed by Melissa Leapman for Cascade Yarns

Skill Level

Intermediate

Sizes

Small (Medium, Large, 1X, 2X). Instructions are for smallest size, with changes for other sizes noted in parentheses as necessary.

Finished Measurements

Bust: 35 ½ (38, 42, 46 ½, 51)"

Total length: 22 (22 ½, 23, 23 ½, 24)"

Materials

Cascade Yarn's *Dolce*, 10 (11, 12, 13, 14) hanks of #961

One pair *each* of sizes 5 and 7 knitting needles or size needed to obtain gauge

Cable needle

Gauge

In Cable Patt with larger needles, 22 sts and 28 rows = 4". **To save time, take time to check gauge.**

Stitch Patterns

Cabled Rib Pattern (*mult 6 + 2 sts*)

See chart.

Main Cable Pattern (*mult 6 + 2 sts*)

See chart.

Back

With smaller needles, CO 98 (104, 116, 128, 140) sts.

Beg Cabled Rib Patt, and work even until piece measures approx 2 ½" from beg, ending after WS row.

Change to larger needles, beg Main Cable Patt, and work even until piece measures approx 14" from beg, ending after WS row.

Shape Armholes

BO 4 (5, 6, 7, 8) sts at beg of next two rows, BO 2 (2, 3, 4, 5) sts at beg of next two rows, then dec 1 st each side every row 0 (0, 4, 6, 10) times, then every other row 9 (10, 9, 9, 8) times—68 (70, 72, 76, 78) sts rem.

Cont even in patt until piece measures approx 21 (21 ½, 22, 22 ½, 23)" from beg, ending after WS row.

Shape Shoulders

BO 4 (4, 4, 5, 5) at beg of next six rows, then BO 3 (4, 5, 4, 5) sts at beg of next two rows—38 sts rem.

BO.

Front

Work same as back until piece measures approx 19 ½ (20, 20 ½, 21, 21 ½)" from beg, ending after WS row.

Shape Neck

Next Row (RS): Work across first 26 (27, 28, 30, 31) sts; join second ball of yarn and BO middle 16 sts, work to end row.

Work both sides at once with separate balls of yarn, and BO 5 sts each neck edge once, BO 2 sts each neck edge twice, then dec 1 st each neck edge every row twice—15 (16, 17, 19, 20) sts rem each side.

Cont even, if necessary, until piece measures same as back to shoulders.

Shape Shoulders

Work same as for back.

Sleeves

With smaller needles, CO 50 sts.

Beg Cabled Rib Patt, and work even until piece measures approx 2 ½" from beg, ending after WS row.

Change to larger needles, beg Main Cable Patt, and inc 1 st each side every sixth row 0 (0, 4, 8, 12) times, every eighth row 3 (8, 10, 7, 4) times, then every tenth row 8 (4, 0, 0, 0) times—72 (74, 78, 80, 82) sts.

Cont even until sleeve measures approx 18 ½" from beg, ending after WS row.

Shape Cap

BO 4 (5, 6, 7, 8) sts at beg of next two rows, then dec 1 st each side every fourth row 0 (0, 0, 0, 1) times, every other row 9 (13, 15, 19, 19) times, then every row 10 (6, 5, 1, 0) times—26 sts rem.

BO 3 sts at beg of next four rows—14 sts rem.

BO.

Finishing

Block pieces to measurements.

Sew left shoulder seam.

Neckband

With RS facing and smaller needles, pick up and knit 86 (86, 92, 92, 92) sts along neckline.

Beg with Row 1 of patt, work Cabled Rib Patt until neckband measures approx 3 ½" from beg, ending after Row 1 of patt.


BO *loosely* in patt.

Sew right shoulder seam, including side of neckband.


Set in sleeves.

Sew sleeve and side seams.

Cabled Rib Pattern
(mult 6 + 2 sts)

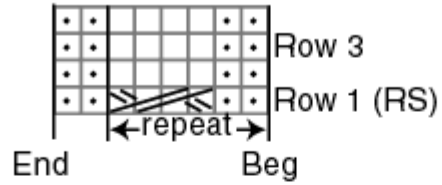

Main Cable Pattern
(mult 6 + 2 sts)

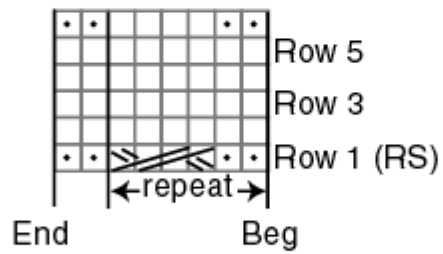

KEY □ = K on RS; P on WS

• = P on RS; K on WS

≡ = Slip 2 sts onto cn and hold in back; K2; K2 from cn

